


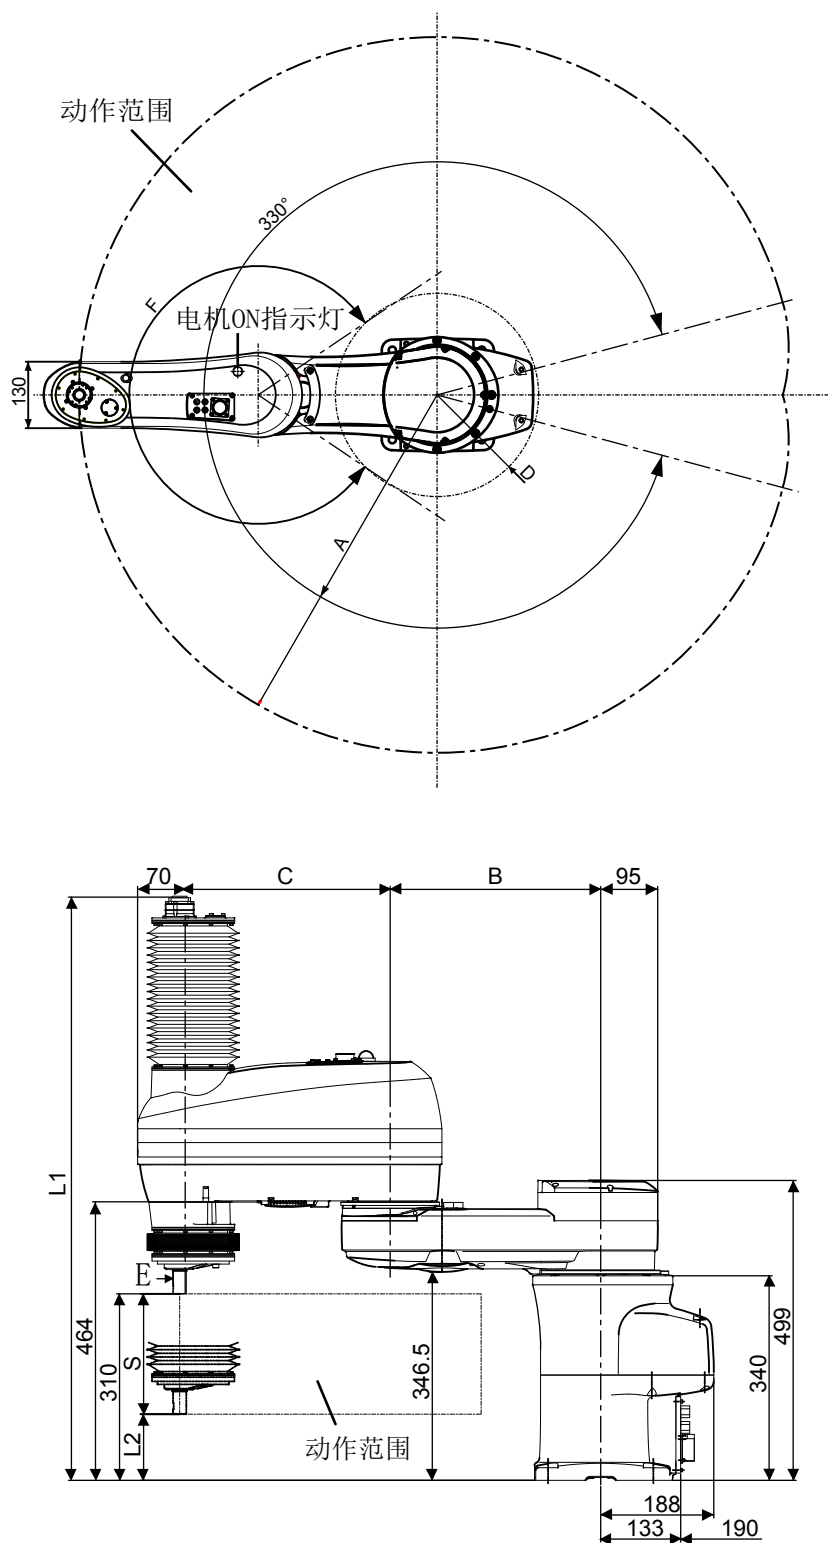

单位: mm

型 式	A	B	C	D	F
HM-4060*-W-UL, HM-4A60*-W-UL	600	250	350	226	280°
HM-4070*-W-UL, HM-4A70*-W-UL	700	350	350	205	292°
HM-4085*-W-UL, HM-4A85*-W-UL	850	350	500	281	294°
HM-40A0*-W-UL, HM-4AA0*-W-UL	1000	500	500	284	294°

S (Z轴行程)	L1	L2
200	972	110
300	1072	10
400 (注2)	1172	-90

注1: 图中的尺寸以10kg可搬运用(HM-40***-W-UL)为基准进行记录、工具安装面、法兰安装图的()内的尺寸表示20kg可搬运用(HM-4A***-W-UL)。

注2: Z轴行程为400mm时, Z轴的最下端点低于基准安装面的位置。

